
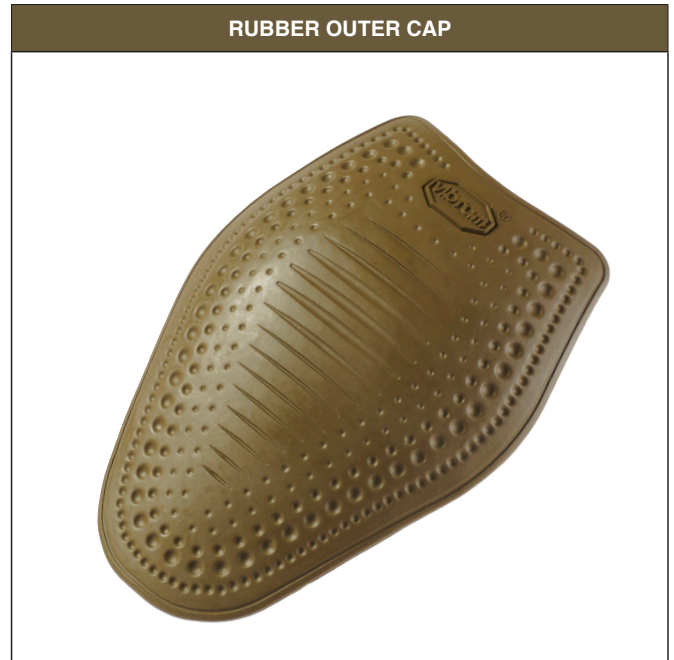


RUBBER OUTER CAP

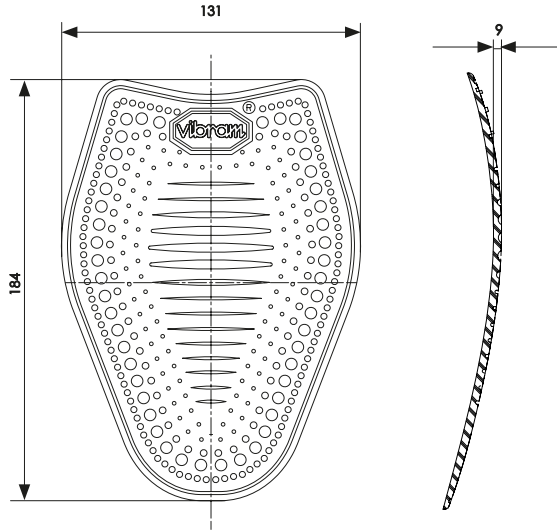

Rubber Outer Cap - Product Details

| | RUBBER OUTER CAP COYOTE - small | RUBBER OUTER CAP COYOTE - large | RUBBER OUTER CAP MOJAVE - small | RUBBER OUTER CAP MOJAVE - large | RUBBER OUTER CAP BLACK - small | RUBBER OUTER CAP BLACK - large | RUBBER OUTER CAP GREY - small | RUBBER OUTER - large |
|---|---|---|---|---|---|---|---|---|
| PRODUCT CODE | 12981 | 12980 | 13107 | 13108 | 12982 | 12983 | 13234 | 13233 |
| DIMENSIONS- MM | 100 X 140 | 131 X 184 | 100 X 140 | 131 X 184 | 100 X 140 | 131 X 184 | 100 X 140 | 131 X 184 |
| THICKNESS- MM | 2.5MM | 2.5MM | 2.5MM | 2.5MM | 2.5MM | 2.5MM | 2.5MM | 2.5MM |
| WEIGHT- GRAMS | 54 | 116 | 54 | 116 | 54 | 116 | 54 | 116 |
| ASTM D1630/ABRASION NBS (%) | >150 | >151 | >152 | >153 | >154 | >155 | >156 | >157 |
| COMPOUND | SO315 | SO316 | SO317 | SO318 | SO319 | SO320 | SO321 | SO322 |
| ISO 37 TENSILE | >15 | >15 | >15 | >15 | >15 | >15 | >15 | >15 |
| ISO 37 ELONGATION % | >400 | >400 | >400 | >400 | >400 | >400 | >400 | >400 |
| ISO 34-1 T TEAR RESISTANCE | >8KN/m | >8KN/m | >8KN/m | >8KN/m | >8KN/m | >8KN/m | >8KN/m | >8KN/m |
| ISO 34-1B C-TEAR RESISTANCE | >50kg/cm | >50kg/cm | >50kg/cm | >50kg/cm | >50kg/cm | >50kg/cm | >50kg/cm | >50kg/cm |
| ISO 20344 8.6 OIL RESISTANCE | <12% | <12% | <12% | <12% | <12% | <12% | <12% | <12% |
| ISO 20344 8.7 RESISTANCE TO HOT CONTACT | PASS | PASS | PASS | PASS | PASS | PASS | PASS | PASS |
| ISO 20344.5.10 ESR | 8kv,60Hz AC x 1minute,leakage< 1mA; | 8kv,60Hz AC x 1minute,leakage< 1mA; | 8kv,60Hz AC x 1minute,leakage< 1mA; | 8kv,60Hz AC x 1minute,leakage< 1mA; | 8kv,60Hz AC x 1minute,leakage< 1mA; | 8kv,60Hz AC x 1minute,leakage< 1mA; | 8kv,60Hz AC x 1minute,leakage< 1mA; | 8kv,60Hz AC x 1minute,leakage< 1mA; |
| ISO 15025 FR | Use butane fire, Samples that self-extinguish within two seconds of flame shut off PASS | Use butane fire, Samples that self-extinguish within two seconds of flame shut off PASS | Use butane fire, Samples that self-extinguish within two seconds of flame shut off PASS | Use butane fire, Samples that self-extinguish within two seconds of flame shut off PASS | Use butane fire, Samples that self-extinguish within two seconds of flame shut off PASS | Use butane fire, Samples that self-extinguish within two seconds of flame shut off PASS | Use butane fire, Samples that self-extinguish within two seconds of flame shut off PASS | Use butane fire, Samples that self-extinguish within two seconds of flame shut off PASS |
| ISO 2781 DENSITY | 1.23-1.29 | 1.23-1.29 | 1.23-1.29 | 1.23-1.29 | 1.23-1.29 | 1.23-1.29 | 1.23-1.29 | 1.23-1.29 |
| ISO 868- HARDNESS SHORE A | 70°-80° | 70°-80° | 70°-80° | 70°-80° | 70°-80° | 70°-80° | 70°-80° | 70°-80° |

For more information on Rubber Outer caps, please contact your Delta Three Oscar Business Development Manager